

COUNTERBALANCED

4-wheel engine trucks torque converter



M315 - 318

1.5t - 1.8t
 6970 mm
 DIESEL / LPG

M320 - 325

2.0t - 2.5t
 6970 mm
 DIESEL / LPG

M330 - 335

3.0t - 3.5t
 6970 mm
 DIESEL / LPG

4-wheel engine trucks hydrostatic



Drago 150 - 180 - 200

1.5t - 1.8t - 2.0t
 6170 mm
 DIESEL / LPG

Drago H 250 - 300 - 350

2.5t - 3.0t - 3.5t
 7960 mm
 DIESEL / LPG

Drago E 250 - 300 - 350


2.5t - 3.0t - 3.5t
 7960 mm
 DIESEL / LPG



Drago 400 - 450 - 500

4.0t - 4.5t - 5.0t
 6650 mm
 DIESEL

The data in this specification sheet was determined based on our standard testing conditions. Operating performance may vary depending on the actual specification and condition of the truck, as well as the condition of the operating area. Availability and specifications are determined regionally and are subject to change without notice. Please contact your authorised CESAB distributor for further details. DUNGE_EU_2014 / PAB FORKHOE_V39 - Copyright CESAB Material Handling Europe.

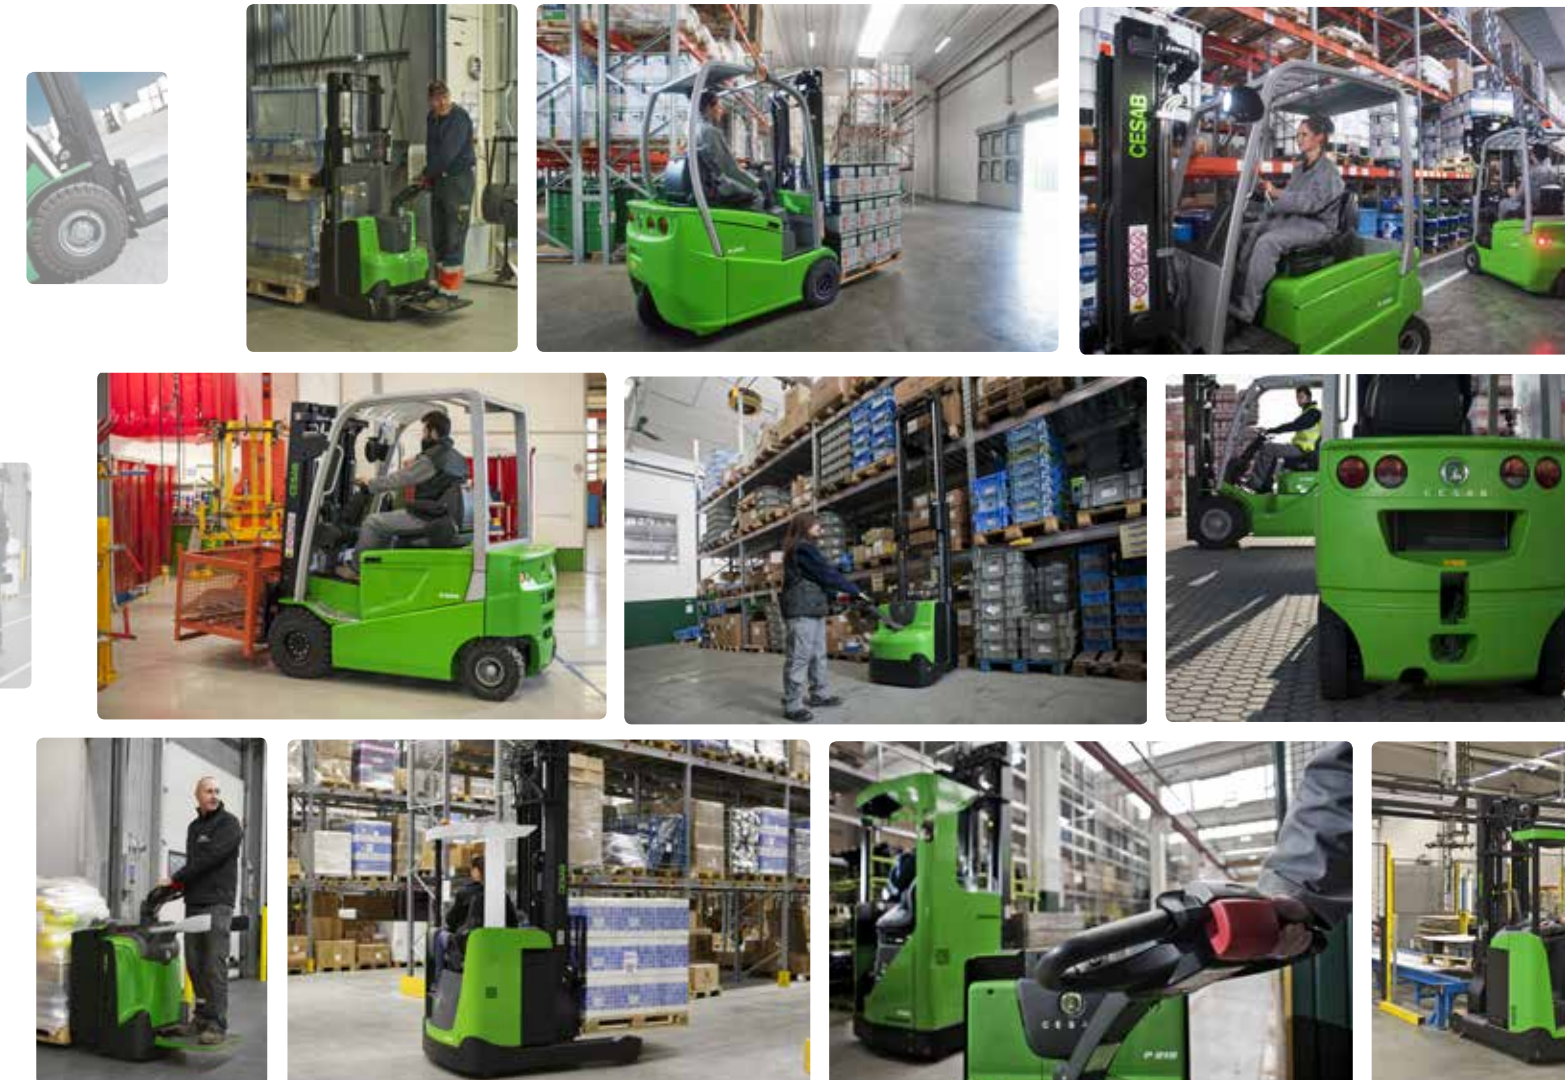

BERNDT_{bv}

Postadres:
 Schrijnwerker 4
 9502 KH STADSKANAAL

Bezoekadres:
 Schrijnwerker 4
 9502 KH STADSKANAAL

T: (0599) 45 42 02
 F: (0599) 45 40 79
 E: info@berndtbv.nl



COUNTERBALANCED

3-wheel electric trucks



BIT 800 - 1000 - 1200

0.8t - 1.0t - 1.2t
 5965 mm
 24V / 800 Ah



B210 - 213 - 215

1.0t - 1.25t - 1.5t
 6470 mm
 24V / 1000 Ah



B315 - 316 - 316L - 318 - 318L - 320

1.5t - 1.6t - 1.8t - 2.0t
 7470 mm
 48V / 750 Ah

4-wheel electric trucks



B415 - 416 - 416L - 418 - 418L - 420

1.5t - 1.6t - 1.8t - 2.0t
 7470 mm
 48V / 750 Ah



B620 - 625 - 625L - 630 - 630L - 635

2.0t - 2.5t - 3.0t - 3.5t
 6500 mm
 80V / 775 Ah



Mak 400 - 450 - 500

4.0t - 4.5t - 5.0t
 7450 mm
 80V / 775 Ah

Compact electric trucks



cenTAURO 48 160L - 200L

1.6t - 2.0t
 6970 mm
 48V / 840 Ah



cenTAURO 80 250 - 300

2.5t - 3.0t
 6860 mm
 80V / 735 Ah



B860 - 870 - 885

6.0t - 7.0t - 8.5t
 6450 mm
 80V / 1250 Ah

WAREHOUSE EQUIPMENT

Hand pallet trucks



CE200 - 230 - 300

2.0t - 2.3t - 3.0t
 The 2.3 t model is also available with low forks, quicklift feature and handbrake. Low forks are standard on the 2.0 t model.



CE200ST

2.0t
 Stainless steel version.



H210 - 210E

1.0t
 800 mm
 Manual and electric scissor lifters.
 S110S: straddle support arm version.

Powered pallet trucks



P113

1.3t
 24V / 63 Ah



P214 - 216 - 218 - 220 - 225

1.4t - 1.6t - 1.8t - 2.0t - 2.5t
 24V / 300 Ah
 Optional operator platform available for P220.



P320 - 322

2.0t - 2.2t
 24V / 600 Ah
 Available with a choice of travel speed (6, 8, 10 km/h).

Reach trucks



R112 - 114 - 116

1.2t - 1.4t - 1.6t
 8500 mm
 48V / 620 Ah
 Also available as a drive-in version with narrow overhead guard.



R212 - 214 - 216

1.2t - 1.4t - 1.6t
 8500 mm
 48V / 620 Ah
 Also available as a cold store version as well as drive-in version with narrow overhead guard.



R314 - 316 - 318 - 320 - 325

1.4t - 1.6t - 1.8t - 2.0t - 2.5t
 12500 mm
 48V / 930 Ah
 Also available as a cold store version, with or without heated cabin, as well as a drive-in version with narrow overhead guard.

Powered stacker trucks



S110 - 110S

1.0t
 2000 mm
 24V / 63 Ah
 S110S: straddle support arm version.



S208L

0.8t
 1580 mm
 24V / 230 Ah
 Can lift up to 2000 kg when lifting with the support arms only. Available with optional automatic height adjustment.



S210 - 212 - 214

1.0t - 1.2t - 1.4t
 4755 mm
 24V / 300 Ah
 Optional operator platform available.



S212S

1.2t
 4755 mm
 24V / 300 Ah
 Straddle support arms. Optional operator platform also available.



S212L - 214L

1.2t - 1.4t
 4755 mm
 24V / 300 Ah
 Elevating support arms. Optional operator platform available.



S220D

1.0t
 2100 mm
 24V / 300 Ah
 Double stacker, lifts 800 + 1200 kg lifting with forks + support arms or 2000 kg when lifting with the support arms only. Optional operator platform available.



S313 - 316 - 320

1.25t - 1.6t - 2.0t
 5400 mm
 24V / 425 Ah
 Also available as a walkie version (without platform and longer tiller arm).



S313L - 316L - 320L

1.25t - 1.6t - 2.0t
 5400 mm
 24V / 425 Ah
 Elevating support arms. Also available as a walkie version (without platform and longer tiller arm).



S314S

1.35t
 5400 mm
 24V / 425 Ah
 Adjustable straddle support arms. Also available as a walkie version (Without platform and longer tiller arm).

Legend

Rated capacity	Additional info
Maximum lifting height	Fuel type
Maximum battery capacity	Nominal draw-bar pull